
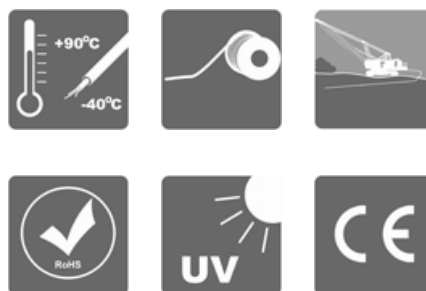


MINING FLEXIBLE CABLE

Trackless Scoop 640/1100V

POWERMITE

Flexible ,copper screened rubber insulated and sheathed cables

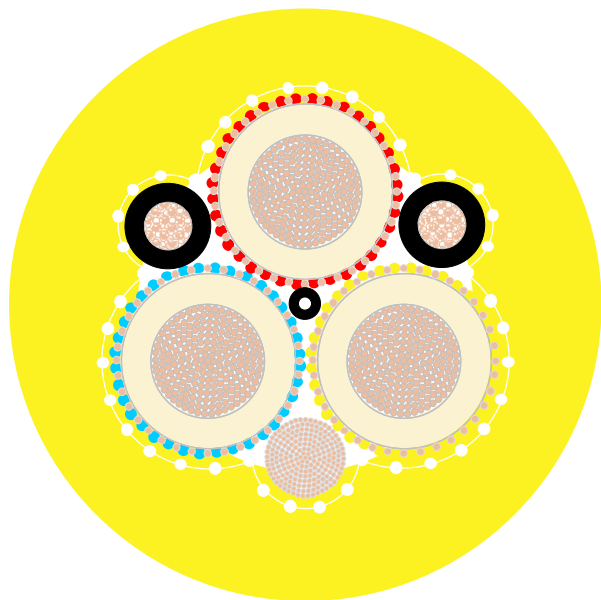

CONSTRUCTION	
Conductors	Flexible class 5 comply to SANS 1411 - 1 from tinned annealed copper wires.
Separator	A suitable tape separator between the conductor and insulation.
Insulation	Ethylene propylene thermosetting compound type RD 6 comply to SANS 1411-3
Core of cable	Three tinned copper/nylon braid screened power cores and two unscreened pilot core and one tinned earth conductor laid up in the right hand lay around rubber type RD1 dummy centre .
Outer sheath	Extra heavy duty yellow CM sheath type RS 6 comply to SANS 1411 .
Physical Properties :	As per table 1
Electrical Properties:	As per table 2
Flame propagation	IEC 60332-1-2:2004 ,EN 60332-1-2:2004
Standard marking	TF KABLE 3 Texoprene Trackless Scoop (Size) (Voltage)(Year) + metre marking

FEATURES	
▪	Excellent flexibility
▪	Water resistant and flame retardant
▪	Temperature range -25°C to $+90^{\circ}\text{C}$.For fixed installation lowest temperature is -40°C
▪	UV ,sunlight , ozone ,oil, resistant
▪	Legible and indelible ink jet or embossing (for 25mm^2 and larger) marking as per order

APPLICATIONS	
▪	Submersible pumps , on board wiring for machines .
▪	Single , double ,triple drilling rigs ,loaders , low haulage dumpers , loaders , large drilling rigs.

MINING FLEXIBLE CABLE

Trackless Scoop 640/1100V

POWERMITE

- Other industrial applications

Standard length cable packing 1000m on drums. Other forms of packing and delivery are available on request

Table 1

Physical Properties

Power cores

Conductor sizes (mm ²)	2.5	10	16	25	35	50	70
Maximum wire diameter (mm)	0.26	0.41	0.41	0.41	0.41	0.41	0.51
Approx. conductor diameter (mm)	2.1	4.2	5.3	6.8	8.5	10.3	11.9
Maximum screen wire diameter (mm)	0.21	0.31	0.31	0.31	0.31	0.31	0.31
Braided screen filling factor (%)	80	80	80	80	80	80	80
Approx. summarized screen cross-section for power cores (weighing method) (mm ²)	8	19	22	25	27	32	37

Pilot cores

Number of pilot cores	-	2	2	2	2	2	2
Conductor sizes (mm ²)	-	4	4	6	6	10	10
Maximum wire diameter (mm)	-	0.31	0.31	0.31	0.31	0.41	0.41
Approx. conductor diameter (mm)	-	2.7	2.7	4.2	4.2	5.3	5.3

Earth cores

Number of earth cores	1	1	1	1	1	1	1
Conductor sizes (mm ²)	1.5	6	10	16	16	25	35
Maximum wire diameter (mm)	0.26	0.41	0.41	0.41	0.41	0.41	0.41
Approx. conductor diameter (mm)	1.7	3.3	4.2	5.3	5.3	6.8	8.5
Lay Ratio (maximum) (x PCD)	12	8	8	8	8	8	8

Cable diameter

MINING FLEXIBLE CABLE

Trackless Scoop 640/1100V



Minimum	(mm)	16.5		34.5	36.4	37.0	43.6	50.1
Maximum	(mm)	18.3		37.5	37.7	40.0	46.9	54.0
Cable mass (approx.)	(kg/m)	0.52	1.50	2.20	2.74	3.10	4.01	5.41
Minimum bending radius	(mm)	100		210	310	320	370	430
Maximum recommended tension	(kN)	0.12	0.50	0.79	1.24	1.73	2.48	3.47

Table 2

Electrical Properties								
Power cores								
Maximum cond. DC resistance @ 20 ⁰ C	(Ω/km)	8.54	2.11	1.34	0.859	0.610	0.424	0.299
Maximum cond. DC resistance @ 90 ⁰ C	(Ω/km)	11.39	2.69	1.79	1.15	0.814	0.566	0.399
Reactance	(Ω/km)	0.121	0.108	0.103	0.100	0.090	0.090	0.088
Impedance (Z) @ 90 ⁰ C	(Ω/km)	11.39	2.69	1.79	1.15	0.819	0.573	0.409
Sustained current rating @ 30⁰C ambient								
Laid out straight	(A)	35	100	111	141	181	221	270
1 layer on drum	(A)	29	81	91	120	151	180	231
2 layer on drum	(A)	23	61	71	91	121	141	181
3 layer on drum	(A)	16	41	51	61	81	101	121
Short circuit rating :								
Symmetrical fault current	(kA for 1 sec)	0.3	1.1	1.8	2.8	4.0	5.7	7.9
Earth fault current (screens)	(kA for 1 sec)	0.3	0.6	1.0	1.6	2.1	3.1	3.5

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which POWERMITE assumes legal responsibility. POWERMITE reserves rights to introduce changes to the document at any time.